
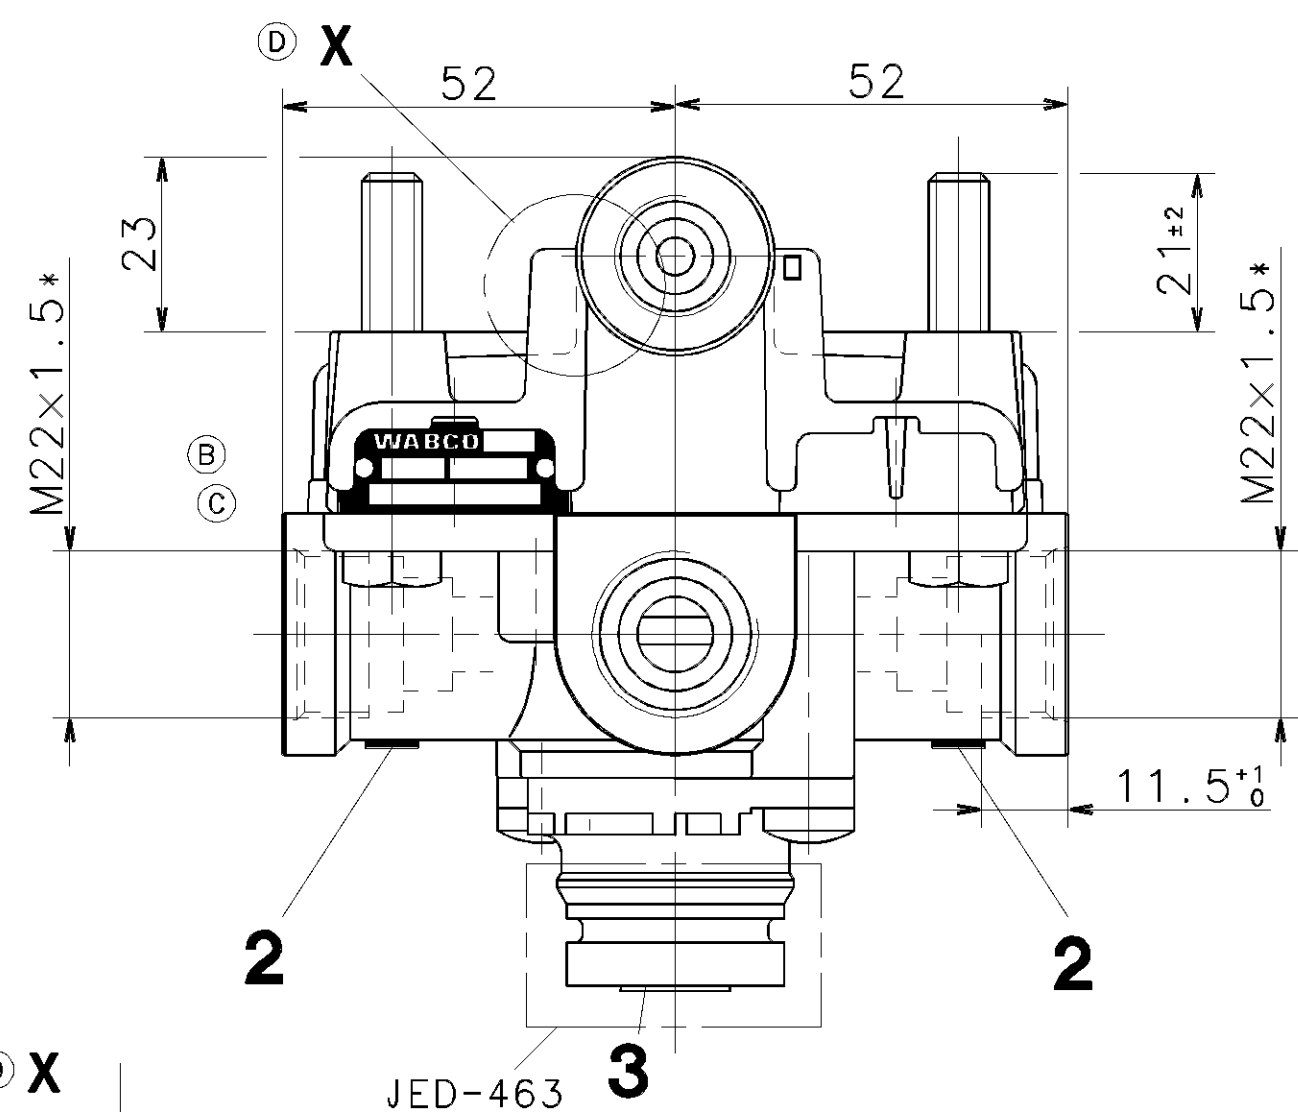
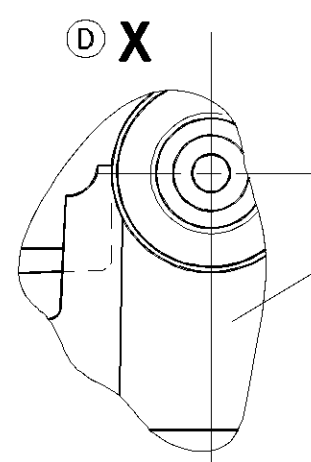
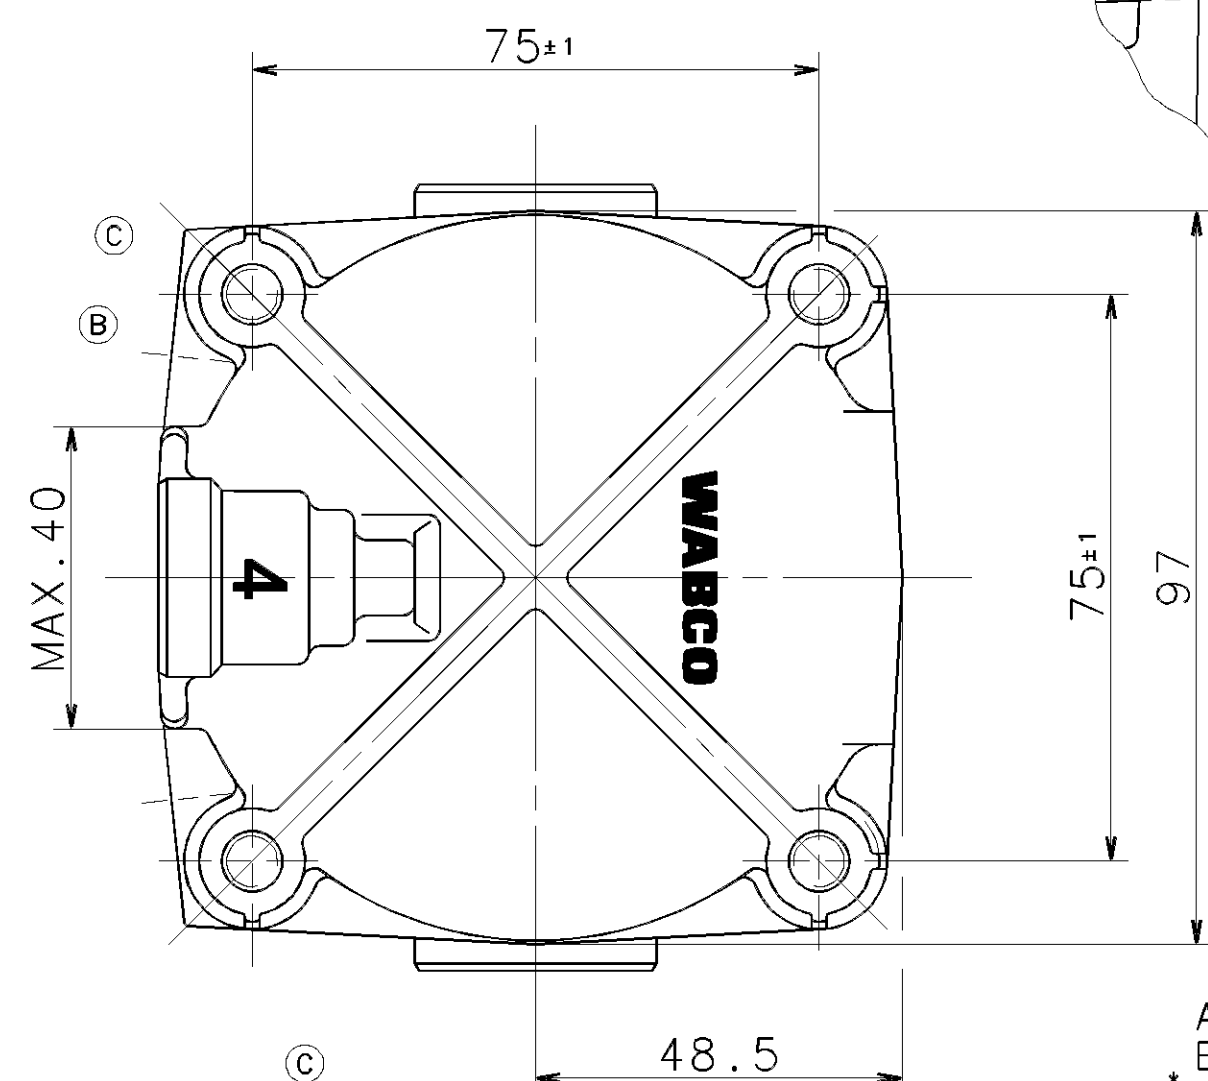


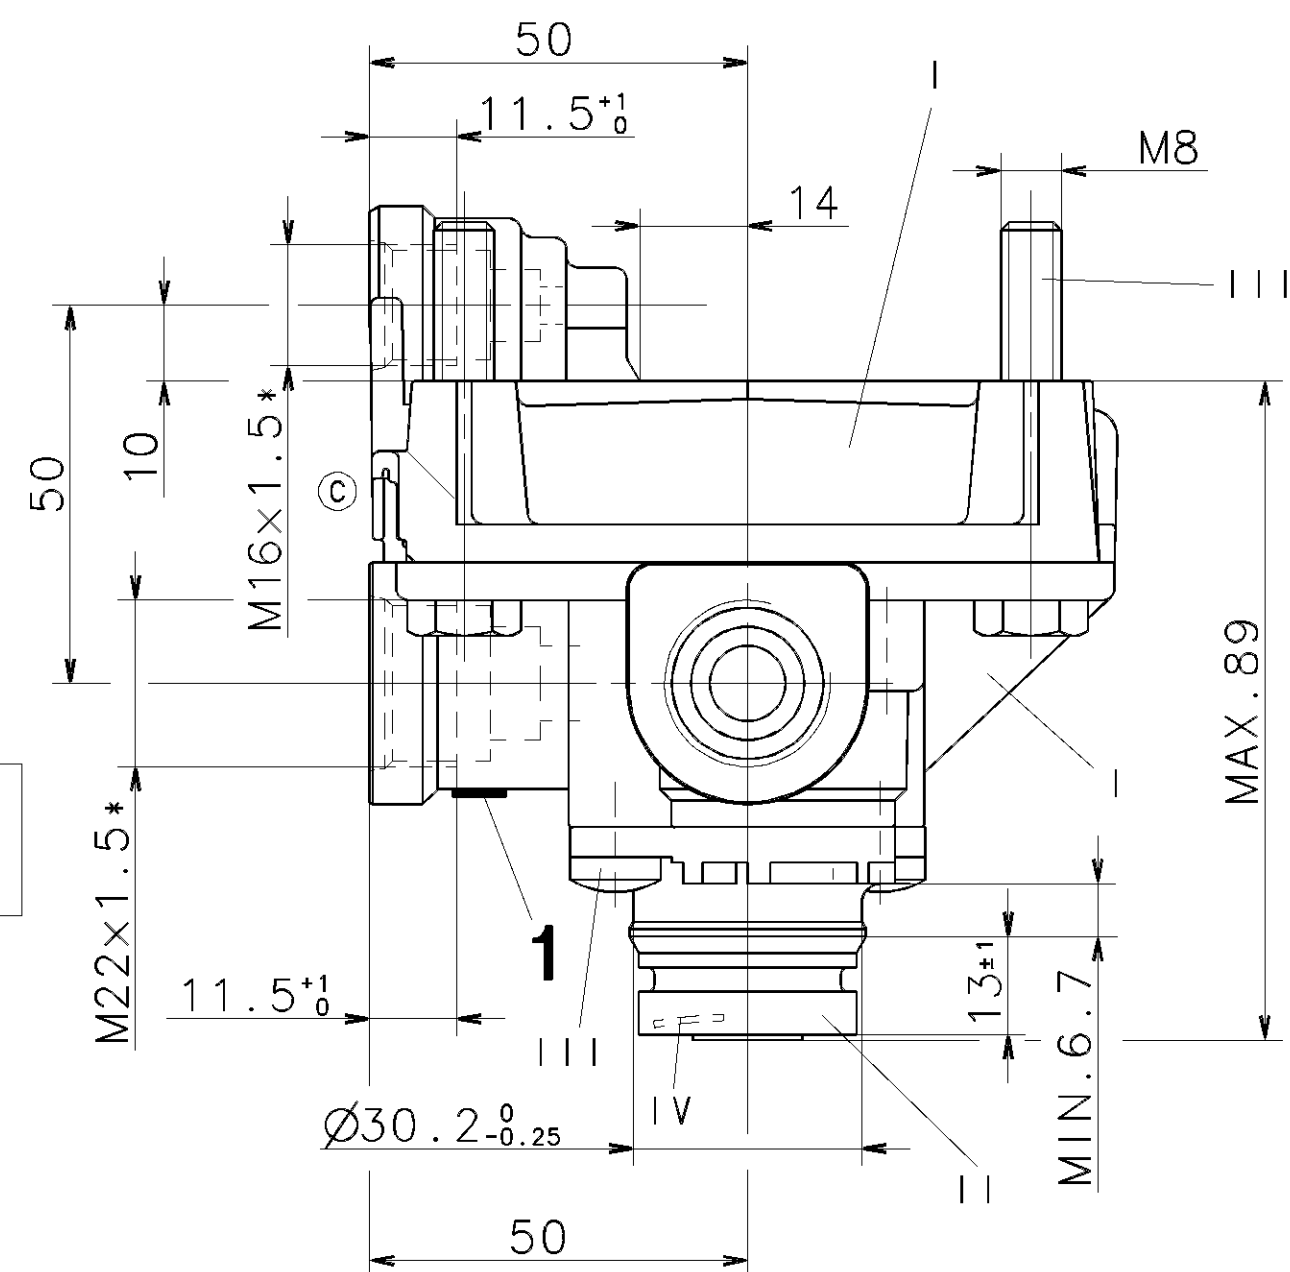

DESIGN PERMISSIBLE
AUSFUEHRUNG ZULAESSIG
REALISATION ADMISE
DISEGNO AMMISSIBILE

SUPPLY
VORRAT
ALIMENTATION
ALIMENTAZIONE

2 DELIVERY PRESSURE
AUSGESTEUERTER DRUCK
PRESSION DELIVREE
PRESSIONE EROGATA

3 EXHAUST ENTLUEFTUNG ECHAPPEMENT SCARICO


4 CONTROL PRESSURE
STEUERDRUCK
PRESSION DE COMMANDE
PRESSIONE DI COMANDO

MEDIUM: AIR
MEDIUM: LUFT
FLUIDE: AIR
FLUIDO: ARIA


WORKING PRESSURE:
BETRIEBSDRUCK: MAX. $p_e = 10\text{bar}$
PRESSION DE SERVICE:
PRESSIONE D'ESERCIZIO:

SUPPLY PRESSURE: MAX. $p_e = 13\text{bar}$
 VORRATSDRUCK:
 PRESSION D'ALIMENTATION:
 PRESSIONE DI ALIMENTAZIONE:

PERMISSIBLE INSTALLATION
ZULAESSIGE EINBAULAGE
POSITION D'INSTALLATION ADMISE
POSIZIONE DI MONTAGGIO AMMESSA

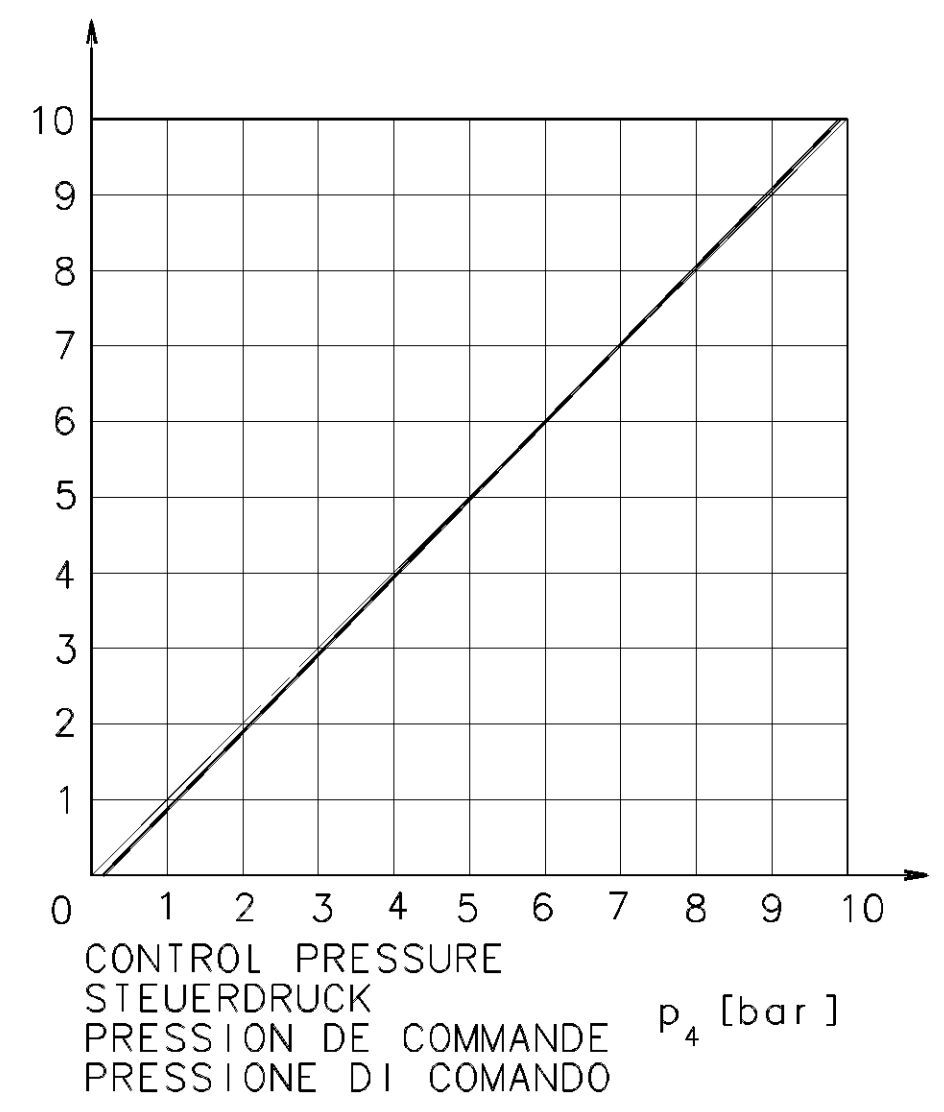

TEMPORARILY: (A)
KURZZEITIG: MAX. $p_e = 13 \text{ bar}$
DE COURTE DUREE:
BREVE TEMPO SOLO:

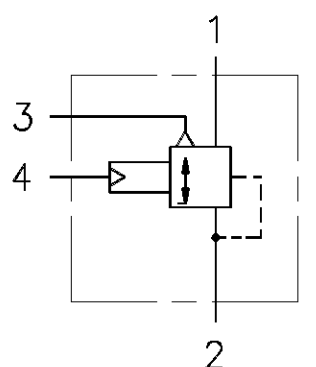

TORQUE FOR CONNECTIONS:
 ANZUGSMOMENT FUER EINSCHRAUBSTUTZEN: M16x1.5: $M_{max.} = 34 \text{ Nm}$
 COUPLE DE SERRAGE DES RACCORDS: M22x1.5: $M_{max.} = 53 \text{ Nm}$
 COPPIA DI SERRAGGIO DEI RACCORDI:

MATERIAL AND SURFACE PROTECTION	
I	Al JED-029 M1/C JED-259
II	POM JED-005 M1
III	Fe JED-051 M4/Zn/C JED-256
IV	NBR JED-235

THERMAL RANGE OF APPLICATION:
THERMISCHER ANWENDUNGSBEREICH:
GAMME D'APPLICATION THERMIQUE: -40°...+80° C
CAMPO DI APPLICAZIONE TERMICA:

[illegible]