
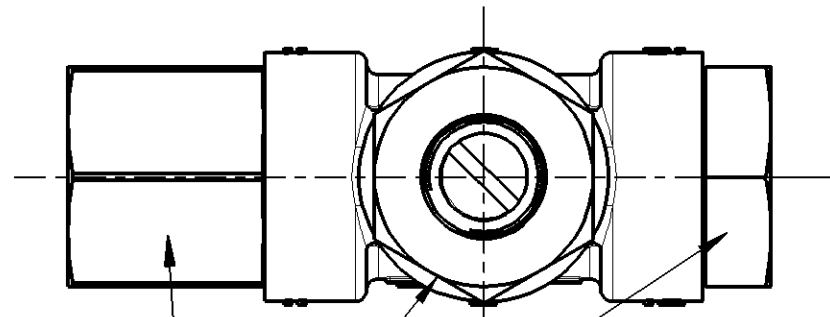


Non e permesso consegnare a terzi o riprodurre questo documento, ne utilizzare il contenuto o renderlo comunque noto a terzi senza autorizzazione esplicita. Ogni infrazione costituira un evidente abuso e comportera il risarcimento dei danni subiti. E' fatta riserva di tutti i diritti derivanti da brevetti o modelli.


Toute communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement a cette regle constitue un abus evident et expose son auteur au versement de dommages et interets. Tous droits de propriete industrielle reserves, notamment en matiere de brevets et de modesles.

Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Contravention of this restriction will constitute an evident abuse and result in a liability to the payment of damages. All rights are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.

Weitergabe sowie Vervielfaeltigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdruesslich zugestanden. Zuwiderhandlungen stellen einen offensichtlichlichen Missbrauch dar und verpflichten zu Schadenersatz. Alle Rechte fuer den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.

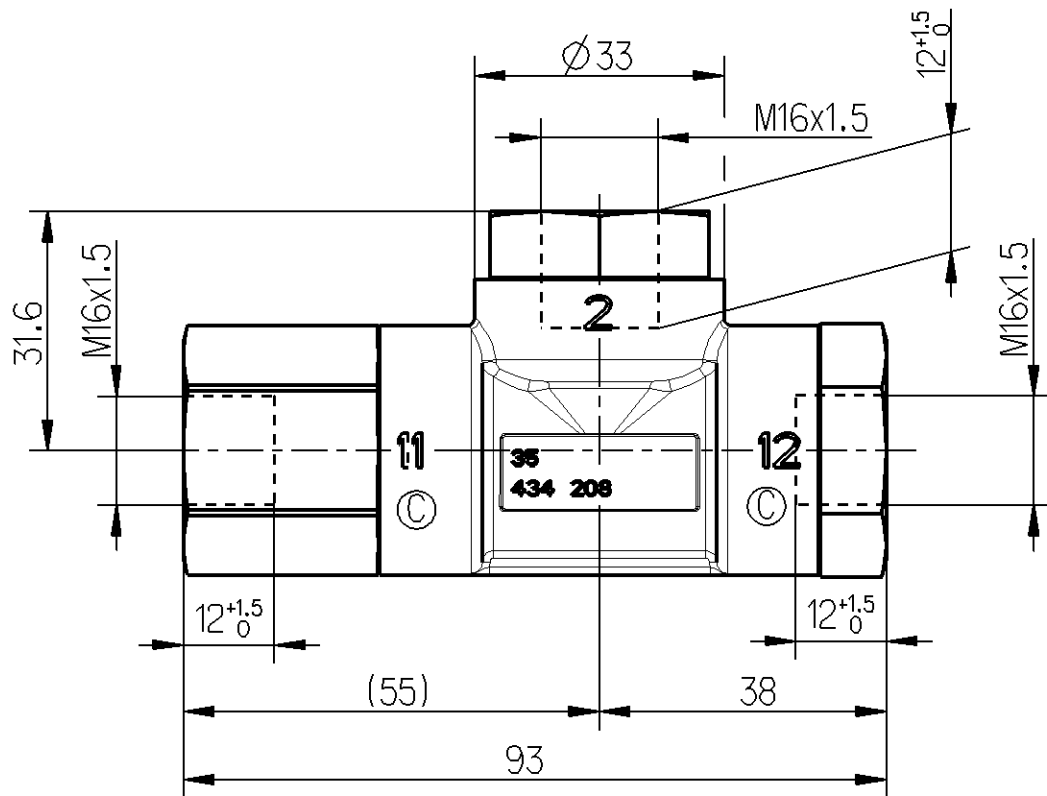

WIDTH ACROSS FLATS:
SCHLUESSELWEITE:
SURPLATS:
LARGHEZZA IN CHIAVE: . . . 29

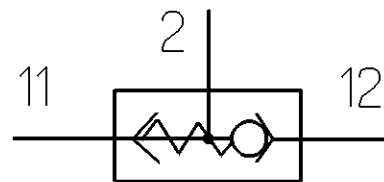

MEDIUM: AIR
MEDIUM: LUFT
FLUIDE: AIR
FLUIDO: ARIA

MAX. WORKING PRESSURE:
MAX. BETRIEBSDRUCK:
PRESSION D'UTILISATION MAX.:
PRESSIONE DI ESERCIZIO MAX.: 10 bar

THERMAL RANGE OF APPLICATION:
THERMISCHER ANWENDUNGSBEREICH:
GAMME D'APPLICATION THERMIQUE:
CAMPO DI APPLICAZIONE TERMICA: -40°C ... +80°C

VALVE OPENING PRESSURE PORT 12:
VENTIL OEFFNUNGSDRUCK BEI ANSCHLUSS 12:
PRESSION D'OUVERTURE ORIFICE 12:
PRESSIONE DI APERTURA ORIFIZIO 12: < 0.1 bar

General Specification: JED-334-0						Copyright WABCO®			WABCO										
Further Technical Data:						Date		Signature											
Doc. Code:			Sheet:			To			DOUBLE CHECK VALVE ZWEIWEGEVENTIL DOUBLE VALVE D'ARRET DOPPIA VALVOLA D'ARRESTO										
General Tolerances JED-261						Drawn													
Class 1)		Range of Nominal Dimensions (± mm)				2009-05-05			Mazurkiewicz										
						Checked													
						2009-11-13			Czapiewski										
						Expert													
						Czapiewski													
Fine			0.5	1.0	1.5	2.0	Mass		Scale		Material No.		Date of first issue:						
Medium		X	1.0	2.0	3.0	4.0	0.39 KG		1:1		434 208 055 0		Doc.Code		Language		Sheet		
Coarse			2.0	3.5	5.0	6.5	Size		CAD System				005		ML		1/1		
Tapped Holes acc.						A 3		Pro/E				ECN-No.		Revision		Techn. Resp.		Replacement for	
1) Tolerance Class Applied Crossmarked												121937		2 C		5140			



100mm