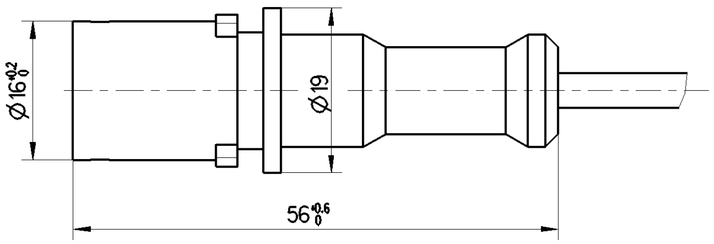



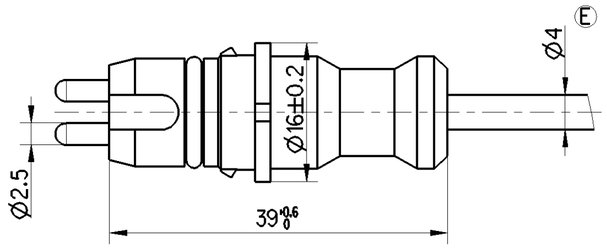



THERMAL RANGE OF APPLICATION THERMISCHER ANWENDUNGSBEREICH GAMME D'APPLICATION THERMIQUE CAMPO TERMICO D'APPLICAZIONE	-40°C...+80°C
TWO CORE CABLE LEITUNG ZWEIADRIG CABLE A DEUX CONDUCTEURS CAVO A DUE CONDUTORI	PUR, MATT SURFACE PERMISSIBLE 2x0.35mm² Ⓔ
STRAIN RELIEF CABLE ZUGENTLASTUNG KABEL ARRET DE CABLE SCARICO DI TRAZIONE DEL CAVO	MAX. 50N ϑ =20°C
BEND RADIUS CABLE BIEGERADIUS KABEL RAYON DE COURBURE DU CABLE RAGGIO DI CURVATURA DEL CAVO	R 15 MIN, ∢ 90°

CODE OF LENGTH LAENGENCODIERUNG CODE DE LA LONGUEUR CODICE DEL LUNGHEZZA	
PART NO TEILE NR. NO DE PIECE CODICE	L[m] 449 712 □□,□ 0
EXAMPLE BEISPIEL EXEMPLE ESEMPIO	L =_2_m 449 712 020 0
MIN/MAX LENGTH MIN/MAX LAENGE MIN/MAX LONGUEUR MIN/MAX LUNGHEZZA	L_{min} = 0.1m L_{max} = 20m
TOLERANCES TOLERANZEN TOLERANCES TOLERANZA	L < 10m ±0.050m L ≥ 10m ±0.075m

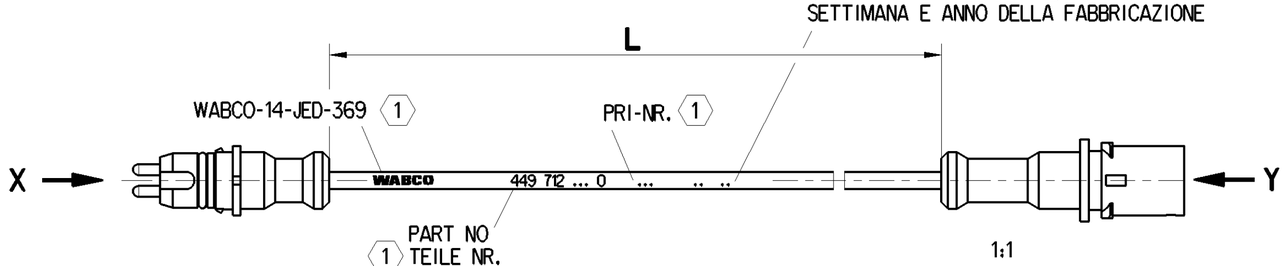

1 ABRASION RESISTANT PRINT
ABRIEBFESTER AUFDRUCK
IMPRESSION RESISTANCE A L' ABRASION
IMPRONTA RESISTENTE ALL' ABRASIONE
} RAL 9001

RESISTANT TO BESTAENDIG GEGEN RESISTANT A RESISTENTE A	AIR, WATER, MINERAL OIL, PETROL, DIESELOIL, SALTSPRAY LUFT, WASSER, MINERALOEL, BENZIN, DIESELOEL, SALZSPRUEHNEBEL AIR, EAU, HUILE MINERALE, ESSENCE, GASOIL, BROUILLARD SALIN ARIA, AQUA, OLIO MINERALE, BENZINA, GASOLIO, NEBBIA SALINA
FURTHER TECHNICAL DATA SEE PRODUCT SPECIFICATION WEITERE TECHNISCHE DATEN SIEHE PRODUKT SPEZIFIKATION POUR AUTRES DONNEES TECHNIQUES VOIR PRODUCT SPECIFICATION PER ULTERIORI DATI TECNICI VEDERE SPECIFICA DI PRODOTTO	894 590 010 2
DEGREE OF PROTECTION (IN CONNECTION WITH PLUG) SCHUTZART (IN VERBINDUNG MIT KUPPLUNGSSTECKER) DEGRE DE PROTECTION (DANS CONNECTION AVEC FICHE) GRADO DI PROTEZIONE (IN RELAZIONE CON SPINOTTO)	IP 68/6K9K ISO 20653

General Specification: JED-334-1 , Size ISO 14405 LP						
Further Technical Data:						
Doc. Code:			Sheet:	To		
General Tolerances JED-261						
		Range of Nominal Dimensions (± mm)				
Class 1)		≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	∢
Fine		0.5	1.0	1.5	2.0	±3°
Medium		1.0	2.0	3.0	4.0	
Coarse	X	2.0	3.5	5.0	6.5	
Tapped Holes acc.						
1) Tolerance Class Applied Crossmarked						

Copyright WABCO®

Date	Signature
Drawn 2019-02-27	Selkowicz
Checked 2019-03-18	Overhage
Expert Overhage	

WABCO

CABLE WITH CONNECTOR PLUG/SOCKET
KABEL MIT KUPPLUNGSSTECKER/DOSE
CABLE AVEC CONNECTEUR MALE/FEMELLE
CAVO CON CONNETTORE

Mass	Scale	Material No.	Date of first issue: -		
/ KG	2:1 1:1	449 712 000 0	Doc.Code	Language	Sheet
			053	ML	1/1
Size	CAD System				
A 2	CREO	ECN-No. 179063	Revision 2 x E	Techn. Resp. 6390_EM	Replacement for 449 712 000 0/95-01-09

100mm

Toute Communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement à cette règle constitue un abus évident et expose son auteur au versement de dommages et intérêts. Tous droits de propriété industrielle reservés, notamment en matière de brevets et de modèles.

Non è permesso consegnare a terzi o riprodurre questo documento, ne utilizzarne il contenuto o renderlo comunque noto a terzi senza autorizzazione esplicita. Ogni infrazione costituirà un evidente abuso e comporterà il risarcimento dei danni subiti. E' fatta riserva di tutti i diritti derivanti da brevetti o modelli.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen stellen einen offensichtlichen Missbrauch dar und verpflichten zu Schadenersatz. Alle Rechte fuer den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.

Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Contravention of this restriction will constitute an evident abuse and result in a liability to the payment of damages. All rights are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.